



W NetFree Staple Pattern Guide

Application	Slope		Channel
	≤ 4:1	≤ 3:1	≤ 48 Pa (1.0 lb/ft ²) Shear Stress ≤ 0.9 m/sec (3.0 ft/sec) Velocity
Staple Pattern	A	B	C


⊗ = Staple Placement

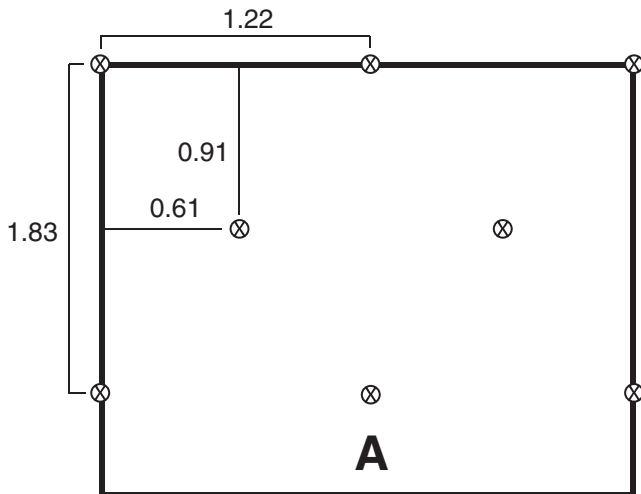

1.08 Staples/m²

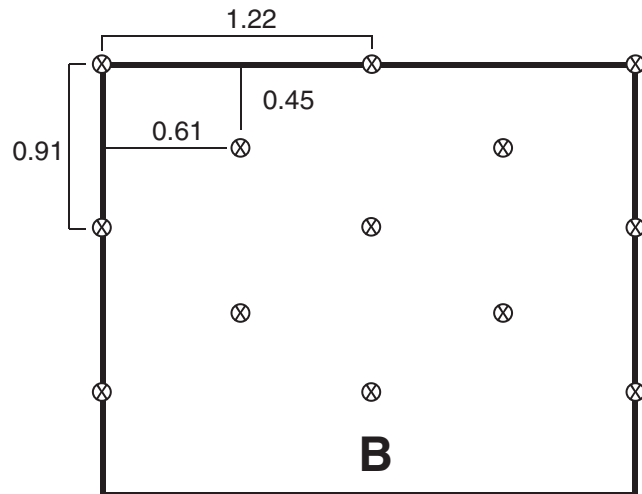

2.28 Staples/m²

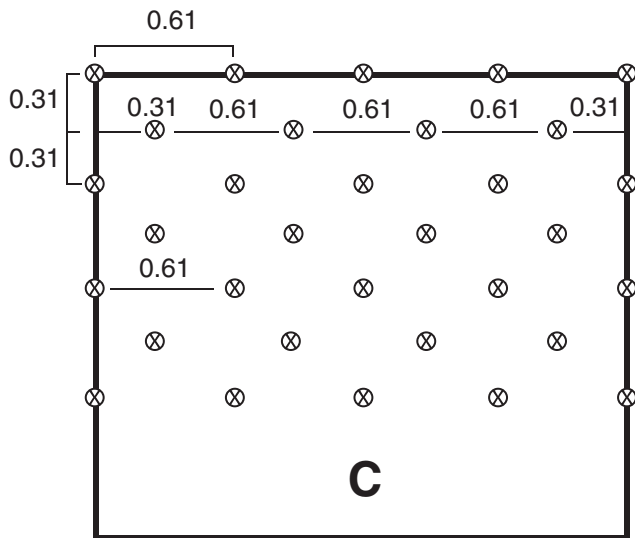

5.74 Staples/m²

Notes:

1. Recommended staples are a minimum 4" long 100% biodegradable staple for cohesive soils and 6" long 100% biodegradable staple or 8" wire for non-cohesive soils.
2. Staples shall be placed on a stitch line and for best results insert staples so heads are parallel to the flow of water.
3. Not to scale: Dimensions in metres unless otherwise noted.
4. Adjust staple pattern so staples are placed in critical channel points (e.g. slope interface, channel bottom) as illustrated below:

Critical channel points are circled.

